

Admonter 





NATURE'S FAVOURITE DESIGNER

Accessories 2016



Admonter



A brand of
STIA Holzindustrie GmbH
Sägestraße 539
8911 Admont, Austria
Tel.: + 43 (0) 3613 / 3350-0
Fax: + 43 (0) 3613 / 3350-117
E-Mail: info@admonter.at

FLOOR S

FLUSH-MOUNT-SKIRTING		
<p>The flush-mount skirting board (protected by patents) is available with almost all Admonter wood species and finishes as well as a version in white that can be finished on site.</p> <ul style="list-style-type: none">• Length 2375 mm• Height approx. 60 mm (visible)		
BASIC PROFILE	High quality aluminium profile	
SCREED HEIGHT GAUGE	<ul style="list-style-type: none">• Available in 10, 12-13 or 15 mm• Bio-plastic (WPC), recyclable• 100% PVC-free	
SKIRTING	High quality aluminium profile + wood lamella	











LED - STANDARD		
LED Strip Typ 1 Input Voltage (V) 12 Cold white 6000K Width 8 mm	LED-Strip Cold white – Length 5 m (roll) Corresponding transformer 12V 5A 60W	
	<ul style="list-style-type: none"> • Cable extension up to max 10 m with adaptor • We recommend a separate transformer for every 5 lm. • 4,8W 60 LED's / lm. • Safety class IP65 	
LED Strip Typ 1 Input Voltage (V) 24 Cold white 6000K Width 8 mm	LED-Strip Cold white – Length 5 m (roll) Corresponding transformer 24V 3A 72W	
	<ul style="list-style-type: none"> • Cable extension up to max 10 m with adaptor • We recommend a separate transformer for every 5 lm. • 4,8W 60 LED's / lm. • Safety class IP65 	



LED - EXCLUSIVE		
LED Strip Typ 2 Input Voltage (V) 24 Warm white 3000K Width 8 mm	LED-Strip Warm white - Length 5 m (roll) Corresponding transformer 24V 1,5A 35W Dimmer control	
	<ul style="list-style-type: none"> • Cable extension up to max 10 m with adaptor • We recommend a separate transformer for every 5 lm. • 4,08W 60 LED's / lm. • Safety class IP20 	
LED Strip Typ 2 Input Voltage (V) 24 RGB-Color Width 8 mm	LED-Strip RGB-Color - Length 5 m (roll) Corresponding transformer 24V 1,5A 35W Dimmer control (colour)	
	<ul style="list-style-type: none"> • Cable extension up to max 10 m with adaptor • We recommend a separate transformer for every 5 lm. • 5,00W 30 LED's / lm. • Safety class IP20 	



SKIRTING

Typ1	Solid skirting 50 x 18 x 2000 mm		
Typ2	Solid skirting (made from floorboards) 50 x 18 x 1980 mm		
Typ3	Veneered skirting with spruce base material oak and larch 50 x 18 x 2400 mm <i>also available white, suitable for all products!</i>		
Typ4	white lacquer 18 x 18 x 2400 mm <i>suitable for all products!</i>		

CORNER STICKS / FIXING CLIPS


Corner sticks white 22 x 22 x 62 mm 2 pcs. / pack. ideal for corners or as a profile finish	
Fixing clips Plastic clip for an easy and invisible installation of skirting Clips CH23 for skirting Typ 1 / 2 / 3 30 pcs. / pack including screws and dowels - (3 - 4 clips / lm.)	

STAIR NOSING

3-layer-Stairnosing tongue & groove 15 mm (Typ A)


Length: 1980 mm

Length 2380 mm: only order-specific production and longer lead time!

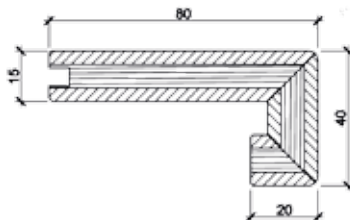

2-layer-Stairnosing tongue & groove 10 mm (Typ B)


Length: approx. 1200 mm

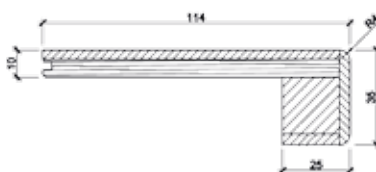

3-layer-Stairnosing lock-it 15 mm (Typ C)

Length: 1980 mm


Length 2380 mm: only order-specific production and longer lead time!

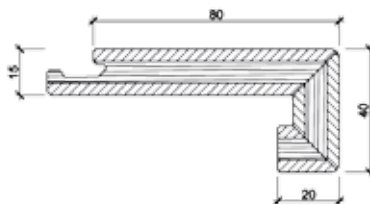

Stair nosing for special projects tongue & groove 15 mm (Typ D)

Length: 1980 mm


Length 2380 mm: only order-specific production and longer lead time!


























Stair nosing for special projects lock-it 15 mm (Typ E)









Length: 1980 mm

Length 2380 mm: only order-specific production and longer lead time!



For the perfect care and maintenance			Packaging-units
CARE & MAINTENANCE		Admonter Care set for Natural-oiled surfaces contains: 1 litre Clean & Care nature, 1 litre Maintenance oil nature, 500 ml Hydro Cleaner, 1 polishing pad white, 1 grey scouring pad, 1 sponge, 1 care & laying instruction	1 piece
		Admonter Care set for white Natural oiled surfaces contains: 1 litre Clean & Care white, 1 litre Maintenance oil white, 500 ml Hydro Cleaner, 1 polishing pad white, 1 grey scouring pad, 1 sponge, 1 care & laying instruction	1 piece
		Admonter Care set for Natural brown oiled surfaces contains: 1 litre Clean & Care, 1 litre Maintenance oil brown, 1 polishing pad white, 1 sponge, 1 care & laying instruction	1 piece
		Admonter Clean & Care: for care & maintenance	for natural oiled, UV oiled and matt lacquered surfaces
		Admonter Clean & Care white: for care & maintenance	for white natural oiled surfaces
		Admonter Maintenance oil natural clear: for the FIRST CARE of natural oiled surfaces and for regular care & maintenance of natural oiled and UV-oiled surfaces (1 litre will cover: 70 - 100 m ²)	1 litre
		Admonter Maintenance oil natural white: for the FIRST CARE of natural white oiled surfaces and for regular care & maintenance of white natural oiled surfaces (1 litre will cover: 70 - 100 m ²)	1 litre
		Admonter Maintenance oil natural brown: or the FIRST CARE of dark or thermo-treated natural oiled surfaces and for the regular care & maintenance of dark or thermo-treated natural oiled or UV oiled surfaces (1 litre will cover: 70 - 100 m ²)	1 litre
		Admonter Maintenance oil natural grey: for the FIRST CARE of grey natural oiled surfaces and for the regular care & maintenance of natural oiled surfaces (1 litre will cover: 70 - 100 m ²)	1 litre
		Admonter base oil white: for touch up / reconditioning of white oiled finishes. Mixture ratio available upon request!	1 litre
RECONDITIONING		Admonter Hydro-cleaner: only for flooring experts - for an intensive cleaning by using a polis- hing pad and for the cleaning in case of reconditioning of the natu- ral oiled or UV oiled surface	1 litre
		Admonter high traffic oil: for an additional protection coat and for reconditioning of natural oiled surfaces	750 ml
		Admonter high traffic oil white: for an additional protection coat and for reconditioning of white natural oiled surfaces	750 ml

For the perfect silky matt sheen			Packaging-units
CARE		For small areas: Pad holder without handle, incl. 2 polishing pads	1 piece
		Polishing pad white: dimension: 24 x 11 cm, 5 pieces/pack	1 pack
		Sponge	1 piece
For the perfect installation			Packaging-units
INSTALLATION		Installation set for tongue & groove installation: contains: aying wedges, tapping block and floor iron	1 Set
		5G-s installation key	1 piece
		Joint filling putty	750 g
		Admonter elastic adhesive: for the full-surface stick down installation of all Admonter FLOORs - 50% sound and up to 14 dB rumble absorption (adhesive comb included)	1 bucket à 17 kg
		Primer coat Renoground PU Rapid fast Solvent-free polyurethane primer, EC1	1 bucket à 11 kg
		Notched trowel	1 piece
		Reverse batten for lock-it products: By using these 2 m long battens the direction of the installation can be changed. 5Gc - Floor thickness 13 mm / Thickness reverse batten 6,7 mm 5Gc - Floor thickness 10 mm / Thickness reverse batten 4,2 mm 5Gs - Floor thickness 15 mm / Thickness reverse batten 8,3 mm	1 piece

For the perfect room climate			Packaging-units
		Hygrometer: for the perfect control of the air humidity level	1 piece
For the perfect protection (after installation)			Packaging-units
UNDERLAY		Admonter Natural Underlay: Thickness: 3 mm highly effective moisture barrier and sound impact for floating installation	1 roll à 30 m ²
			1 roll à 10 m ²
		Adhesive tape: to fix the Admonter Natural Floor underlay, moisture barrier, high adhesive power	1 roll à 66 lm.
For the perfect protection (after installation)			Packaging-units
		Floorliner: appropriate and effective protection for covering the floor after installation (Thickness: 1,55 mm, Width: 1 m), with Admonter Logo	1 roll à 50 m ²
Others			Packaging-units
OTHERS		Assembly adhesive Superfix Xtrem from Bostik - 460 g extremely powerful 1-component hybrid adhesive sealant	1 piece à 460 g
		PK Profi Seal Parquet caulking compound - 290 ml available for the following wood species: Maple, Oak, Beech bright, Beech dark, American Cherry, American Walnut, Wenge	1 piece à 290 ml
		Felt pads can be fixed - 200 mm - 16 piece/pack	1 pack
		Hard floor chairmat	1 piece - 152 x 122 cm
			1 piece - 91 x 122 cm

FLOORBOY (BUFFING MACHIN)

The Floorboy XL 300 is an eccentric rotating single disc machine which is mainly suitable for domestic use for cleaning and maintaining wooden floors and for applying maintenance oil on oiled floors.

Driving disc for 12" pads.

This driving disc is suitable for all kinds of pads.

(incl. 1 pc. polishing pad white)

- Replacement pad white



HUMIDIFIER AND PURIFIER BONECO H680

Humidifier and Purifier Boneco H680

This hybrid device can be used as a humidifier, as a purifier or both at the same time. With an air cleaning output of up to 190m³ /h and a humidity output up to 1000 g/h it humidifies and purifies the room air in large offices, townhouses, lofts or medical practices of up to 100 m².

The new humidification system ensures air quality similar to pure air in natural surroundings.

- Mains voltage: 100 – 240 V/ 50 Hz
- Power consumption: 30 W
- Humidity output: 1000 g/h
- Air-cleaning output: 190 m³/h
- For rooms up to: 100 m²



FIDBOX V6

- Model Bluetooth 4.0
- Sensor -2x SHT21
- Measurement interval 8 hours
- Battery included
- Battery life expectancy up to 7 years
(with 3 measurements of temperature and moisture per day)



CUBE TABLE

Size glass top	800 x 800 mm	  
Size bar table	1030 x 600 mm	
Weight	approx. 56 kg	