


LARCH AGED WHITE ROBUST

FLOOR

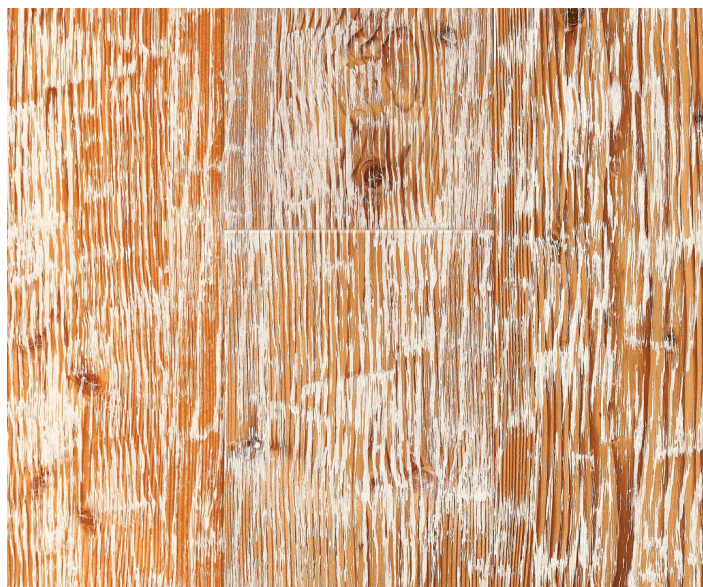

Initial care - with Admonter maintenance oil

You can find more information in the Admonter care- and laying instructions and at www.admonter.eu/en/downloads/



Admonter Natural Floor on under-floor-heating-system

Admonter Natural Floors are ideally suited for under-floor heating systems. We recommend hot-water underfloor heating systems set at low temperature. The surface temperature of 29°C must not be exceeded.

The only exception is Beech. We suggest that our products ideally are fully glued down for best results with Admonter elastic adhesive. However, like all engineered boards our planks can be laid as a floating installation (except 2-layer floors and 3-layer floors small (SF-RS), they have to be fully glued down).

More information at www.admonter.at or contact your specialist dealer.

Skirting: Typ3 white, Typ4

| Grading | Thickn. mm | Width mm | Length mm | Installation and construction | | | Surface | Texture |
|---------|------------|----------|----------------|-------------------------------|--------------------------|---------|-------------|---------|
| | | | | Tongue & groove | | lock-it | | |
| rustic | 15 | 195 | 1850/2000/2400 | - | 3-layer ^{NH-RS} | - | natural oil | robust |

Technical information

| Wood species | Thickness mm | Weight (kg/m ²) | Moisture content (%) | Lambda | d-Value | Hardness | Fire classification |
|-------------------------|--------------|-----------------------------|----------------------|--------|---------|----------|---------------------|
| Larch aged white robust | 15 | 8,2 | 7+/-2 | 0,14 | 0,107 | 23 | C _{fl} -s1 |

LH-RS: Hardwood-backing / **NH-RS:** Softwood-backing
SF-RS: Softwood-veneer-backing, **ng:** natural oiled / **uv:** UV oiled / **ml:** matt lacquer

For more information visit our website **www.admonter.at**

February 2015

