


OAK



Initial care - with Admonter maintenance oil

You can find more information in the Admonter care- and laying instructions and at www.admonter.eu/en/downloads/

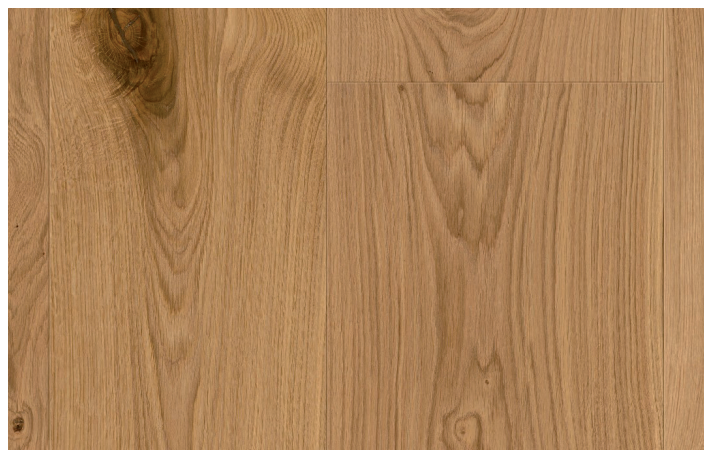

Admonter Natural Floor on under-floor-heating-system

Admonter Natural Floors are ideally suited for under-floor heating systems. We recommend hot-water underfloor heating systems set at low temperature. The surface temperature of 29°C must not be exceeded.

The only exception is Beech. We suggest that our products ideally are fully glued down for best results with Admonter elastic adhesive. However, like all engineered boards our planks can be laid as a floating installation (except 2-layer floors and 3-layer floors small (SF-RS), they have to be fully glued down). More information at www.admonter.at or contact your specialist dealer.

Skirting: Typ1, Typ3, Typ3 white, Typ4

Grading	Thickn. mm	Width mm	Length mm	Installation and construction			Surface	Texture
				Tongue & groove		lock-it		
noblesse	10	158/192	2000	-	-	2-layer	ng, ml	sanded, brushed
	15	138	1850/2000	-	3-layer ^{NH-RS}	-	ng, uv, ml	sanded, brushed
	15	158/192	1850/2000/2400	3-layer ^{LH-RS}	3-layer ^{NH-RS}	3-layer ^{NH-RS}	ng, uv, ml	sanded, brushed
	15	240	1850/2000/2400	3-layer ^{LH-RS}	-	-	ng, uv, ml	sanded, brushed
elegance	10	100/120	1000/1200	2-layer	-	-	ng, ml	sanded, brushed
	10	158/192	2000	-	-	2-layer	ng, ml	sanded, brushed
	13	120	1200	-	-	3-layer ^{SF-RS}	ng, uv, ml	sanded, brushed
	15	158/192	1850/2000/2400	3-layer ^{LH-RS}	3-layer ^{NH-RS}	3-layer ^{NH-RS}	ng, uv, ml	sanded, brushed
basic	12	100/120	1000/1200	2-layer	-	-	ng, ml	sanded, brushed
	15	158/192	1850/2000/2400	3-layer ^{LH-RS}	3-layer ^{NH-RS}	3-layer ^{NH-RS}	ng, uv, ml	sanded, brushed, scraped
	15	192	4000/4500/5000	3-layer ^{LH-RS}	-	-	natural oil	sanded, brushed
	15	240	1850/2000/2400	3-layer ^{LH-RS}	-	-	ng, uv, ml	sanded, brushed, scraped
	15	240/280/325	4000/4500/5000	3-layer ^{LH-RS}	-	-	natural oil	sanded, brushed
naturelle	10	100/120	1000/1200	2-layer	-	-	ng, ml	sanded, brushed
	10	158/192	2000	-	-	2-layer	ng, ml	sanded, brushed
	13	120	1200	-	-	3-layer ^{SF-RS}	ng, uv, ml	sanded, brushed
	15	158/192	1850/2000/2400	3-layer ^{LH-RS}	-	3-layer ^{LH-RS}	ng, uv, ml	sanded, brushed
rustic	10	158/192	1850/2000	-	-	2-layer	natural oil	sanded, brushed
	12	100/120	1000/1200	2-layer	-	-	natural oil	sanded, brushed
	15	158/192	1850/2000/2400	-	3-layer ^{NH-RS}	3-layer ^{NH-RS}	ng, uv	sanded, brushed, geh., antico
	15	192	4000/4500/5000	3-layer ^{LH-RS}	-	-	natural oil	sanded, brushed
	15	240	1850/2000/2400	3-layer ^{LH-RS}	-	-	ng, uv	sanded, brushed, scraped
	15	240/280/325	4000/4500/5000	3-layer ^{LH-RS}	-	-	natural oil	sanded, brushed

Please note: scraped surface texture: available with ng + tongue & groove + lock-it + 3-layer^{LH-RS} + 3-layer^{NH-RS} **antico surface texture:** available with ng + tongue & groove + 3-layer^{NH-RS}

Technical information

Wood species	Thickness mm	Weight (kg/m ²)	Moisture content (%)	Lambda	d-Value	Hardness	Fire classification
Oak**	10	6,0 / 6,4	7+/-2 / 7+/-2	0,15 / 0,15	0,067 / 0,073	41 / 41	C _s -s1
Oak	12	7,4	7+/-2	0,16	0,075	41	C _s -s1
Oak	13	7,1	7+/-2	0,14	0,094	41	C _s -s1
Oak*	15	8,9 / 8,5	7+/-2 / 7+/-2	0,15 / 0,14	0,100 / 0,107	41 / 41	C _s -s1

LH-RS: Hardwood-backing / **NH-RS:** Softwood-backing

SF-RS: Softwood-veneer-backing, **ng:** natural oiled / **uv:** UV oiled / **ml:** matt lacquer

* LH-RS / NH-RS ** Length 1000 or 1200 mm / Length 2000 mm



For more information visit our
website **www.admonter.at**

February 2015

A brand of STIA Holzindustrie GmbH, Sägestrasse 539, 8911 Admont, Austria
Errors and changes possible, phone: +43(0)3613/3350-0, fax: +43(0)3613/3350-119, info@admonter.at, www.admonter.at