


OAK EXTRA WHITE



Initial care - with Admonter maintenance oil

You can find more information in the Admonter care- and laying instructions and at www.admonter.eu/en/downloads/

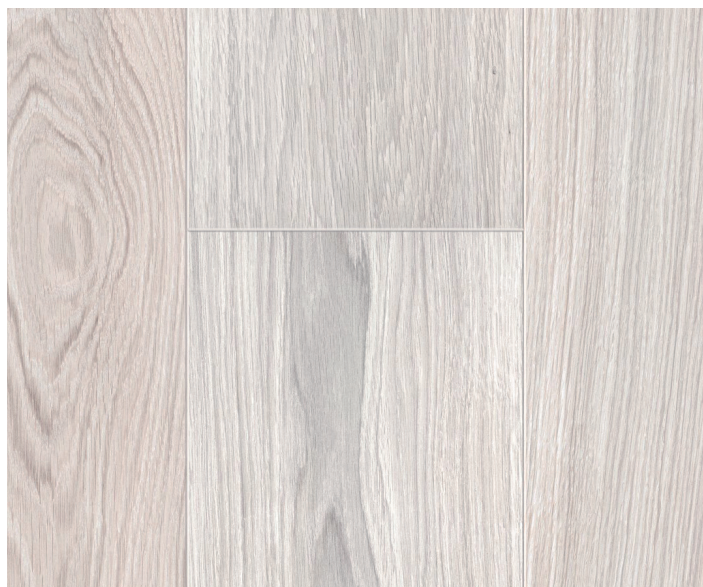

Admonter Natural Floor on under-floor-heating-system

Admonter Natural Floors are ideally suited for under-floor heating systems. We recommend hot-water underfloor heating systems set at low temperature. The surface temperature of 29°C must not be exceeded.

The only exception is Beech. We suggest that our products ideally are fully glued down for best results with Admonter elastic adhesive. However, like all engineered boards our planks can be laid as a floating installation (except 2-layer floors and 3-layer floors small (SF-RS), they have to be fully glued down).

More information at www.admonter.at or contact your specialist dealer.

Skirting: Typ1, Typ3 white, Typ4

Grading	Thickn. mm	Width mm	Length mm	Installation and construction			Surface	Texture
				Tongue & groove		lock-it		
noblesse	15	158	1850/2000/2400	3-layer LH-RS	3-layer NH-RS	3-layer NH-RS	natural oil	brushed
	15	192	1850/2000/2400	3-layer LH-RS	3-layer NH-RS	3-layer NH-RS	natural oil	brushed
	15	240	1850/2000/2400	3-layer LH-RS	-	-	natural oil	brushed
basic	15	158	1850/2000/2400	-	3-layer NH-RS	-	natural oil	brushed, scraped
	15	192	1850/2000/2400	-	3-layer NH-RS	3-layer NH-RS	natural oil	brushed, scraped
	15	240	1850/2000/2400	3-layer LH-RS	-	-	natural oil	brushed, scraped
naturelle	10	100/120	1000/1200	2-layer	-	-	natural oil	brushed
	10	158	2000	-	-	2-layer	natural oil	brushed, scraped
	10	192	2000	-	-	2-layer	natural oil	brushed, scraped
	15	158	1850/2000/2400	3-layer LH-RS	-	3-layer LH-RS	natural oil	brushed
	15	192	1850/2000/2400	3-layer LH-RS	-	3-layer LH-RS	natural oil	brushed

Please note: scraped surface texture available with ng + tongue & groove + lock-it

Technical Information

Wood species	Thickness mm	Weight (kg/m ²)	Moisture content (%)	Lambda	d-Value	Hardness	Fire classification
Oak**	10	6,0 / 6,4	7+/-2 / 7+/-2	0,15 / 0,15	0,067 / 0,073	41 / 41	C _{fl} -s1
Oak*	15	8,9 / 8,5	7+/-2 / 7+/-2	0,15 / 0,14	0,100 / 0,107	41 / 41	C _{fl} -s1

LH-RS: Hardwood-backing / NH-RS: Softwood-backing

SF-RS: Softwood-veneer-backing, ng: natural oiled / uv: UV oiled / ml: matt lacquer

* LH-RS / NH-RS ** Length 1000 or 1200 mm / Length 2000 mm

For more information visit our
website www.admonter.at

February 2015

